


Specifications

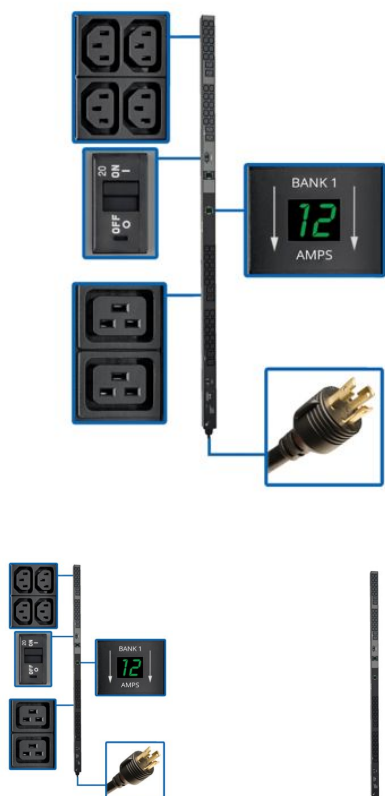

Eaton PDUMV30HV2

Eaton Tripp Lite series metered outlet PDU, 1PH, 0U, NEMA L6-30P input, 10 ft cord, 5.8kW, 24A, 200-240V, 48 Outlets (40) C13 (8) C19

General specifications

PRODUCT NAME	Eaton Tripp Lite series metered outlet PDU
CATALOG NUMBER	PDUMV30HV2
UPC	037332182807
PRODUCT LENGTH/DEPTH	2.52 in
PRODUCT HEIGHT	70 in
PRODUCT WIDTH	2.17 in
PRODUCT WEIGHT	12.35 lb
COMPLIANCES	FCC Class B RoHS
CERTIFICATIONS	UL 62368-1 NOM RETIE

Product specifications

FORM FACTOR	0U (Vertical)
PACKAGE CONTENTS	• PDUMV30HV2 30A 200-240V 5.8kW Single-Phase Local Metered PDU • Plug-lock inserts (8 C20, 40 C13) • Spare installation buttons, 2.9 mm/4.6 mm • Ground screw • Mounting hardware • Owner's Manual
OPERATING TEMPERATURE	32° to 122°F (0° to 50°C)
MOUNTING DIRECTION	Vertical
MATERIAL	Metal
INPUT CONNECTION	NEMA L6-30P
CORD LENGTH	10 ft
AMPERAGE RATING	24A
ELECTRIC CURRENT - MAX	24
PHASE	Single-phase
FREQUENCY RATING	50/60 Hz
NUMBER OF OUTPUTS C13	40
NUMBER OF OUTPUTS C19	8
FEATURES	Flex Center
FRONT PANEL LCD DISPLAY	Set of two digital current meters report output current in two segments
OUTPUT RECEPTACLES	C13 C19
OVERLOAD PROTECTION	Two 20A breakers protect 24 outlets each
RECOMMENDED ELECTRICAL SERVICE	Single-phase 30A 200-240V service
REPORTED LOAD SEGMENTS	Supports local monitoring of output current for each output load bank; Outlets, circuit breakers and current meters are color-coded and labeled for easy identification (Black: 20A Bank 1 / Gray: 20A Bank 2)

Resources

BROCHURES	120V Power Distribution Unit (PDU) Brochure (English)
	120V PDU Brochure Specifications (Spanish)
	Rack Models and Specifications Brochure (Spanish)
MANUALS AND USER GUIDES	120V Power Distribution Unit (PDU) Models and Specifications List (English)
	Owner's Manual for Single Phase Metered 0U Power Distribution Unit (Multi-language)
PRODUCT PAGE (WEB)	PDUMV30HV2 Tripp Lite Model Page

OUTPUT RECEPTACLES DETAILS	Compatible with Eaton Tripp Lite Power Cords
RECEPTACLES	• C13 • C19
INPUT CORD LENGTH	10 ft
PRODUCT FEATURES	TAA Compliant
AMPERAGE RATING DETAILS	Agency de-rated to 24A continuous
OPERATING ELEVATION	0-10000 ft. (0-3000 m)
OPERATING TEMPERATURE RANGE	32° to 122°F (0° to 50°C)
OUTPUT NOMINAL VOLTAGE	200-240V
RELATIVE HUMIDITY	5% to 95% non-condensing
FORM FACTORS SUPPORTED	0U vertical installation in equipment racks, plus under-counter and wallmount
OUTPUT CAPACITY DETAILS	5.8kW (240V), 5.5kW (230V), 5.3kW (220V), 5kW (208V), 4.8kW (200V) total capacity / 30A max (Agency de-rated to 24A), 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max per C13 outlet
STORAGE TEMPERATURE	-22° to 140°F (-30° to 60°C)
PRODUCT HIGHLIGHTS	Dedicated 20A circuit breakers protect output Ideal for server rooms, network closets and data centers Dual load banks with 24 outlets each (4 C19 and 20 C13) NEMA L6-30P input plug with 10-ft. (3 m) cord Ready for immediate toolless 0U installation
PDU PLUG TYPE	L6-30P
PDU TYPE	Local metered
PDU INPUT VOLTAGE	200
PDU FORM FACTOR	Vertical (0U)

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

