


INWESCO

A CRH COMPANY

UNDERGROUND CABLE RACKS

Cable racks support cable runs in manholes and vaults.

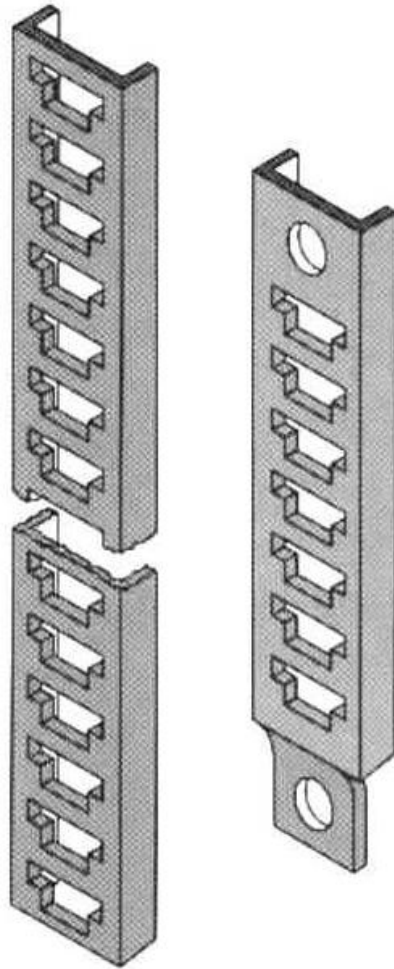

FEATURES:

- HOT DIP GALVANIZED per ASTM A123 / A153
- Manufactured from 1-1/2 x 9/16 x 3/16-inch hot-rolled steel channel
- T-slots spaced at 1-1/2-inch
- 8, 14, and 18-hole racks available with mounting slots at each end that interlock into another rack
- Racks without mounting slots are mounted through T-slots
- Use cable hooks 10A35 through 10A39, 10C38, 10A60, 10B60, 10A61, and 10B61 with these racks

PRODUCT DIMENSIONS AND SPECIFICATIONS:

- Common sizes are displayed.
Contact a sales representative if the size is not shown or for specific product drawings.

Catalog No.	# of Support Holes	Overall Length	Mounting Hole Spacing	Appx. Shipping Wt. Lbs. per 100 Pcs.
10A05	8	15	13-1/2	139
10B05	8	11-3/4		119
10A07	12	17-3/4		179
10A08	14	24	22-1/2	230
10B08	14	20-3/4		210
10C08	15	22-1/4		225
10A09	16	23-3/4		240
10A11	18	30	28-1/2	290
10G11	18	26-3/4		270
10B11	19	28-1/4		285
10C11	20	29-3/4		300
10D11	21	31-1/4		316
10E11	22	32-3/4		331
10F11	23	34-1/4		346
10A12	24	35-3/4		361
10B12	25	37-1/4		376
10A13	27	40-1/4		407
10B13	28	41-3/4		422
10A14	32	47-3/4		482
10A15	35	52-1/4		528
10A16	37	55-1/4		558

10A17	39	58-1/4		588
10A18	40	59-3/4		603
10A19	43	64-1/4		649
10A22	47	70-1/4		710
10A24	51	76-1/4		770
10A25	54	80-3/4		816
10A28	64	95-3/4		967
10B28	65	97-1/4		982
10A30	69	103-1/4		1043
10A32	80	120		1210
10A34	160	240		2420