
Wedge Clamps




Wedge clamps are mechanical holding devices used for strain relief in service applications.

Features

- Wedge clamps are available with a variety of bail lengths and styles as well as with Irridited finish for contaminated areas
- Designed for low tension applications only
- Flexible bails are available and designed for use with hooks and eyes

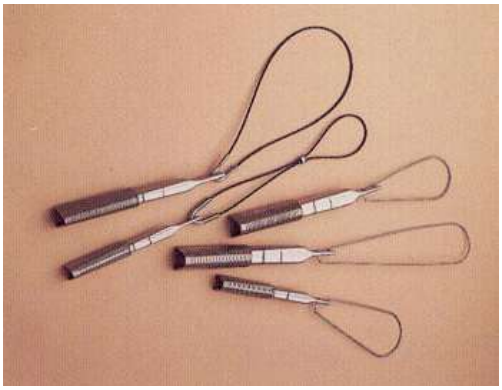

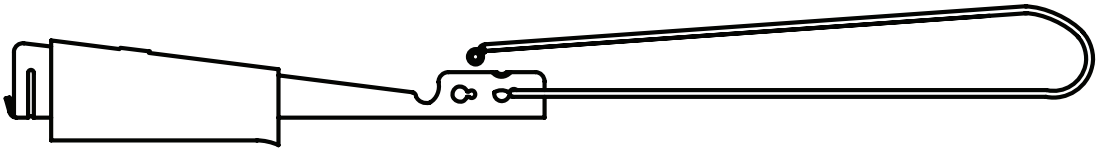

Catalog Number	Bail Description	ACSR ASTM-B232	AAAC ASTM-B399	AAC ASTM-B231	Conductor Diameter Range	Mechanical Ratings (Lb)
7195	6 1/2" solid stainless steel	#2 - #6	#2 - #6	#1 - #6	.160-.330	1000
7195-I	6 1/2" solid stainless steel with irridited finish on wedge and shell	#2 - #6	#2 - #6	#1 - #6		
7196	11" solid stainless steel	#2 - #6	#2 - #6	#1 - #6		
7195-F	12" flexible nylon jacket galvanized aircraft strand	#2 - #6	#2 - #6	#1 - #6		
7195-FI	12" flexible nylon jacket galvanized aircraft strand with irridited finish on wedge and shell	#2 - #6	#2 - #6	#1 - #6		
7195-FL	12" flexible nylon jacket galvanized aircraft strand less ferrule	#2 - #6	#2 - #6	#1 - #6		
7187	6 1/2" solid stainless steel	1/0 - #4	1/0 - #4	2/0 - #2	.250-.414	1200
7187-I	6 1/2" solid stainless steel with irridited finish on wedge and shell	1/0 - #4	1/0 - #4	2/0 - #2		
7188	11" solid stainless steel	1/0 - #4	1/0 - #4	2/0 - #2		
7187-F	12" flexible nylon jacket galvanized aircraft strand	1/0 - #4	1/0 - #4	2/0 - #2		
7187-FI	12" flexible nylon jacket galvanized aircraft strand with irridited finish on wedge and shell	1/0 - #4	1/0 - #4	2/0 - #2		
7187-FL	12" flexible nylon jacket galvanized aircraft strand less ferrule	1/0 - #4	1/0 - #4	2/0 - #2		
7197	6 1/2" solid stainless steel	4/0 - 2/0 1/0*	4/0 - 2/0	4/0 - 2/0	.414	1600
7198	11" solid stainless steel	4/0 - 2/0 1/0*	4/0 - 2/0	4/0 - 2/0		
7197-F	12" flexible nylon jacket galvanized aircraft strand	4/0 - 2/0 1/0*	4/0 - 2/0	4/0 - 2/0		
7197-FI	12" flexible nylon jacket galvanized aircraft strand with irridited finish on wedge and shell	4/0 - 2/0 1/0*	4/0 - 2/0	4/0 - 2/0		
7197-FL	12" flexible nylon jacket galvanized aircraft strand less ferrule	4/0 - 2/0 1/0*	4/0 - 2/0	4/0 - 2/0		

Notes:
1) Suffix "I" denotes irridited finish on wedge and shell
2) Flexible bails are for use on hooks and small eyes. Solid stainless bails are for use on eye hooks and insulators with diameters larger than 1.5"
3) "*" = 1/0 conductor use is 500 lbs maximum
4) For other options, consult factory

© Copyright 2010 MacLean Power Systems
Issued: May 2010
Supercedes: n/a

11411 Addison Avenue, Franklin Park, IL 60131
T: 847.455.0014 F: 847.455.0029
www.macleanpower.com