


Page 1 of 2	Fastenal Product Standard	REV-03
Date: October 31, 2022	FASTENAL	HCS.304

Hex Cap Screw, 304 Stainless Steel

This product standard contains the required dimensional, mechanical, performance, and chemical characteristics of the products shown in this purchase order (as applicable to the product). Unless specified below, current revisions of national or international standards shall be applicable as of the date of Fastenal's purchase order and must be adhered to in their entirety. If the order received does not meet these requirements, corrective action may be issued which could jeopardize your status as an approved supplier to Fastenal.

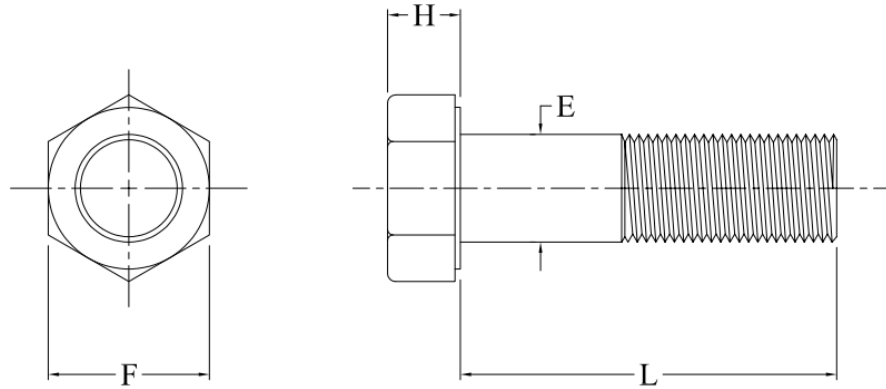

Nominal Size or Basic Product Diameter		E		F		H	
		Body Diameter		Width Across Flats		Head Height	
		Max.	Min.	Max.	Min.	Max.	Min.
1/4	.2500	.2500	.2450	.438	.428	.163	.150
5/16	.3125	.3125	.3065	.500	.489	.211	.195
3/8	.3750	.3750	.3690	.562	.551	.243	.226
7/16	.4375	.4375	.4305	.625	.612	.291	.272
1/2	.5000	.5000	.4930	.750	.736	.323	.302
9/16	.5625	.5625	.5545	.812	.798	.371	.348
5/8	.6250	.6250	.6170	.938	.922	.403	.378
3/4	.7500	.7500	.7410	1.125	1.100	.483	.455
7/8	.8750	.8750	.8660	1.312	1.285	.563	.531
1	1.0000	1.0000	.9900	1.500	1.469	.627	.591
1-1/8	1.1250	1.1250	1.1140	1.688	1.631	.718	.658
1-1/4	1.2500	1.2500	1.2390	1.875	1.812	.813	.749
1-3/8	1.3750	1.3750	1.3630	2.062	1.994	.878	.810
1-1/2	1.5000	1.5000	1.4880	2.250	2.175	.974	.902
1-3/4	1.7500	1.7500	1.7380	2.625	2.538	1.134	1.054

Length and Thread Length per ASME B18.2.1

**RECORD OF REVISION CHANGES TO THIS DOCUMENT ARE LOCATED ON THE
LAST PAGE**

Page 2 of 2	Fastenal Product Standard	REV-03
Date: October 31, 2022	<i>FASTENAL</i>	HCS.304

Specification Requirements:

- Dimensions: ASME B18.2.1
- Material: 304 per ASTM F593
- Mechanical: Alloy Group 1, Condition CW per ASTM F593
- Threads: ASME B1.1, UNC, UNF & UNS, Class 2A
- Product Marking: F593C for sizes through 5/8"
F593D for sizes 3/4" and larger
Manufacturer's ID on all sizes
- Finish: ASTM A380/A380M
- Material Test Reports: The MTR must have documented lot traceability, dimensional results, full chemical test results and full mechanical test results to the specification(s) above. In addition, the MTR shall be in full compliance with Fastenal's MTR Requirements.

Revision Level Changes to this Document

Document Name	Revision Level	Revision Date	Rationale for Revision
HCS.304	01	11/28/2018	Revised finish specification.
HCS.304	02	4/19/2021	Added UNS designation.
HCS.304	03	10/31/2022	Refined image.

The rationale above may not include all of the changes within each revision. A complete review of the Fastenal Product Standard is required.