

IDC Line Modules Auxiliary Subscriber Bridge and Bunching Block, sealed IDC terminals


CORNING

Part Number: ULM-AUX-UUU1

The Corning universal line module (ULM) is a sealed, tool-less subscriber bridge compatible with all industry-standard network interface devices (NIDs). The modular design allows the protector to separate itself from the subscriber module for mounting inside any NID application. The environmentally sealed insulation displacement connections (IDCs) and integrated protector enable heavy-duty protection and termination in one compact, modular unit.

A bypass switch disengages the plug from the jack before subscriber wiring access, fulfilling UL safety requirements. Orange levers and engraved line module doors indicate each tip/ring slot and connected and disconnected IDC positions. Technicians plug standard test clips into each tip/ring contact for quick verification, and integrated test ports facilitate maintenance and troubleshooting for C-11 and customer networks. With four-line capacity, line test electronics, RJ-11 test jack, and integrated test ports, the ULM exceeds Telcordia requirements for sealed terminations.

Tool-less, gel-sealed IDC terminals simplify field-wiring connections as insulated wires are no longer required to be stripped and screw terminated. A snap-in ground feature accommodates additional line module expansions and factory-controlled, preterminated tip/ring connections between line module and protector unit improve installation accuracy. The universality simplifies purchasing and inventory management by reducing the part numbers and standardizes on a common platform.

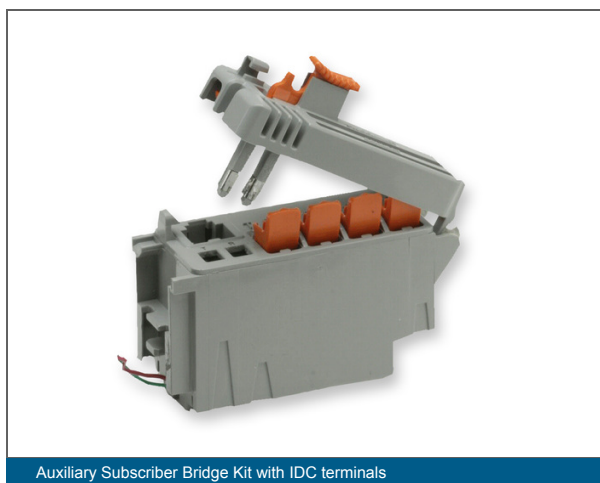

Auxiliary Subscriber Bridge Kit with IDC terminals

Features and Benefits

Universal Line Module is compatible with all industry-standard NIDs

Minimizes installation time and reduces inventory complexity

Instant snap-in line module

Allows quick and easy line module expansions

Environmentally sealed IDC terminations

Withstands harsh environmental conditions

IDC Line Modules Auxiliary Subscriber Bridge and Bunching Block, sealed IDC terminals

CORNING

Specifications

General Specifications

Product Type	Network Interface Devices (NIDs)
--------------	----------------------------------

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	---

Approvals and Listings	USDA Rural Development Programs
------------------------	---------------------------------

Dimensions

Height	6.48 cm
--------	---------

Width	4.66 cm
-------	---------

Weight	5 kg
--------	------

Ordering Information

Product Number	ULM-AUX-UUU1
----------------	--------------

EAN Code	4056418188782
----------	---------------

Package Contents	"Auxiliary Subscriber Bridge and Bunching Block, sealed IDC terminals"
------------------	--

Shipping Weight	4.5 kg
-----------------	--------

Units per Delivery	100/1
--------------------	-------

Shipping Height	35.89 cm
-----------------	----------

Shipping Width	25.1 cm
----------------	---------



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2024 Corning Optical Communications. All rights reserved.