


YHSS14, Heat Shrink Splice For 16 - 14 AWG

By Burndy
Catalog # YHSS14

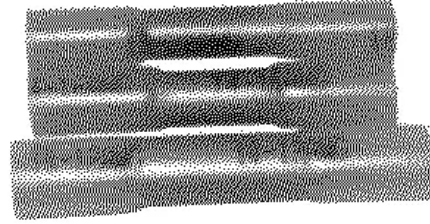

Heat Shrink Splice For 16 - 14 AWG.

Features

- Made from pure copper, annealed for maximum strength
- Color-coded, imprinted with wire size
- Serrated barrels offer maximum wire contact and tensile strength
- Electro-tin plated for corrosion resistance

Application

For Use On Copper Conductor

General

Catalog Number	YHSS14
Connector Type	Seamless Butt Splice
EU RoHS Indicator	Yes
Insulation	Y
Insulation Type	Heat Shrink
Material	Copper
Plated	Y
Plating Type	Tin
Sub Brand	HYDENT
Trade Name	HYDENT™
Type	YHS, Heat Shrink
UPC	781810476901

Dimensions

Dimension - B Length fraction	1/4 in
Dimension - B Length inch	0.25 in
Dimension - L Length Overall mm	38 mm
Dimension - Length Overall inch	1.50 in
Dimension - Strip Length inch	5/16

Conductor Related

Conductor - Copper Solid Size	16 AWG;15 AWG;14 AWG
Conductor - Copper Solid Size Range	16 AWG-14 AWG
Conductor - Copper Str Size	16 AWG;14 AWG
Conductor - Copper Str Size Range	16 AWG - 14 AWG
Conductor Size	16 - 14 AWG
Conductor Type	<ul style="list-style-type: none"> • CU C Solid-Size • CU C Str-Size

Certifications And Compliance

Buy American Compliant	Yes
Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance	CM
Status	
UL Listed	No

Logistics

Carton Quantity	100
Minimum Pack Quantity	100
Packaging Type	Bag

Product Assets

- [3D Models - YHSS14_MODEL-IGES](#)
- [3D Models - YHSS14_MODEL-STEP](#)
- [3D Models - YHSS14_MODEL-PDF](#)
- [Catalogs - BURNDY Master Catalog - Section B - Small Compression](#)
- [Catalogs - BURNDY Master Catalog - Full Line BURNDY Catalog](#)
- [Interactive Catalog - BURNDY Full-Line Digital Catalog](#)
- [Product Cross Section Image\(s\) - BUR_YHSS18_LineArt](#)
- [Sales Drawings - 50094203](#)
- [Specifications - YHSS14](#)