

RocketRibbon® XD Cable-250 1728F, Dielectric, Bend-improved Single-mode (OS2)



Part Number:
H28ZQ4-14101S53

Corning high-density gel-free cables offer the ultimate combination of fiber density and ease-of-use in extreme fiber count outside plant cabling. Providing fibers in an extreme density design, flexible subunits containing stacks of 288 fibers can be easily routed directly into hardware without furcation. Each subunit is also finger-peelable, enabling rapid access to the ribbon stack for faster termination. The conventional 12-fiber ribbon is maintained, ensuring robustness, installer familiarity and no change to the long established mass-fusion splicing process. Each individual ribbon within the subunit features a unique printed ID for fast, easy identification and efficient fiber splicing management.



Features and Benefits

Unique subunit design

Flexible, finger-peelable subunits provide protection of each 288-fiber ribbon stack, eliminating the need for furcation when routing directly into hardware and enabling individual access to each ribbon for efficient management in splice trays.

Complete gel-free design

No messy filling or flooding compounds mean elimination of time, labor and risk associated with cleaning ribbons, enabling cleaner work areas, simplified splice preparation and less installer error.

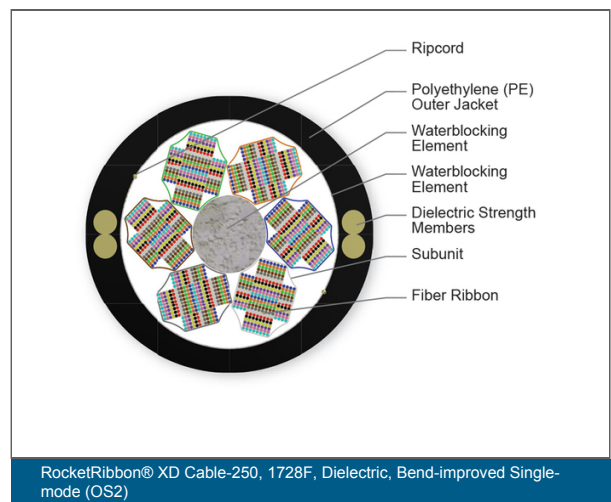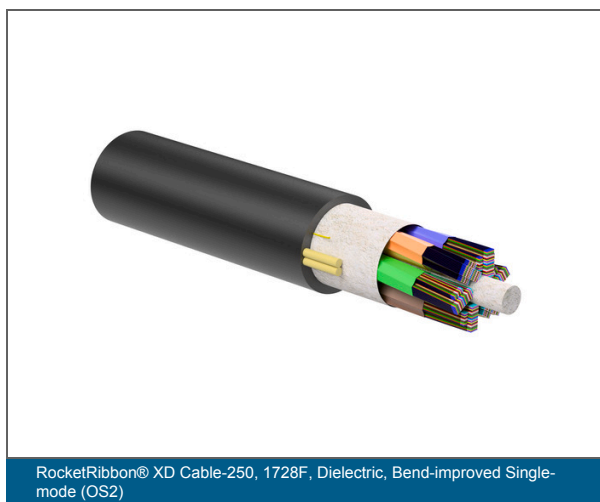

RocketRibbon® XD Cable-250 1728F, Dielectric, Bend-improved Single-mode (OS2)

CORNING

Specifications

General Specifications

Cable Type	Ribbon
Environment	Outdoor
Product Type	Dielectric
Fiber Category	SMF-28® Ultra fiber
Application	Duct
Fiber Count	1728
Cable geometry	Round

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Common Installations	Designed for Duct Applications
Design and Test Criteria	ANSI/ICEA S-87-640, Telcordia GR-20

Environmental Conditions

Temperature Range, Installation	-20 °C to 70 °C (-4 °F to 158 °F)
Temperature Range, Operation	-40 °C to 70 °C (-40 °F to 158 °F)
Temperature Range, Storage	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Fiber Count	1728
Number of Ripcords	2
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Outer Jacket Color	Black
Outer Jacket Material	Polyethylene (PE)
Tensile Strength Elements and/or Armoring - Layer 1	Dielectric strength members

RocketRibbon® XD Cable-250 1728F, Dielectric, Bend-improved Single-mode (OS2)

CORNING

Cable Design

Tape	Water-swellable
Subunit Color	Blue, Orange, Green, Brown, Slate, White
Number of Subunits	6
Ribbons per Subunit	16 (12 F x 4 Ribbon / 24 F x 8 Ribbon / 12 F x 4 Ribbon)
Fibers per Subunit	288

Mechanical Specifications

Max. Tensile Strength, Long-Term	890 N (200.08 lbf)
Max. Tensile Strength, Short-Term	2700 N (606.98 lbf)
Nominal Outer Diameter	26 mm (1.02 in)
Min. Bend Diameter Operation	780 mm (30.71 in)
Min. Bend Diameter Installation	780 mm (30.71 in)

Optical Characteristics

Fiber Code	Z
Fiber Name	SMF-28® Ultra fiber
Fiber Type	Single-mode
Performance Option Code	01
Maximum Attenuation	0.4 dB/km / 0.4 dB/km / 0.3 dB/km
Wavelengths	1310 nm / 1383 nm / 1550 nm
Fiber Category	G.652.D/G.657.A1

Dimensions

Cable Weight	481.91 kg/km (323.83 lb/1000 ft)
--------------	----------------------------------

RocketRibbon® XD Cable-250 1728F, Dielectric, Bend-improved Single-mode (OS2)

CORNING



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2024 Corning Optical Communications. All rights reserved.