


007640-240008

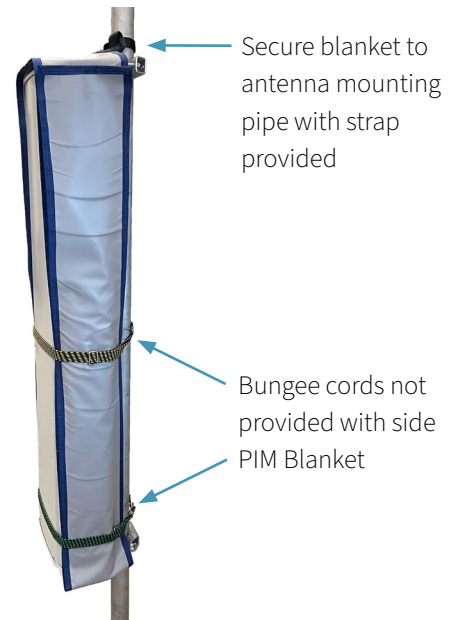

SPECIFICATIONS

<p>General</p>	<p>The Side PIM blanket is a temporary RF barrier used to block radiation +/- 90 degrees from boresight on base station panel antennas. The side PIM blanket is typically used with ConcealFab's PIM Absorber Kits (901124, 901125 and 901162) to help determine the direction of external PIM sources relative to site antennas.</p>
<p>PIM Performance</p>	<p>IM3 < -100 dBm when tested in accordance with IEC 62037-8, 700 MHz and 1900 MHz, near field test, 2x 20W test tones,</p>
<p>RF Attenuation</p>	<p>>10 dB (600 MHz to 2 GHz) >20 dB (>2 GHz)</p>
<p>Construction</p>	<p>Low PIM metal foil sandwiched between heavy duty vinyl outer fabric layers. Nylon webbing tie-down loops provided in center to secure blanket to antenna mounting pipe.</p>
<p>Blanket Dimensions</p>	<p>240-inch long (20 FT) x 8-inch wide</p>
<p>Shipping Dimensions</p>	<p>6-inch x 6-inch x 11-inch</p>
<p>Shipping Weight</p>	<p>4.5 lbs.</p>